


# Technical Datasheet

## Eagle® Poly-V J-Profile (EPJ) for Roller Conveyor

**EAGLE®**

**Compliance:** DIN 7867, ISO 9982/ ASAE S 211.5 / IP26 RMA-MPTA

**Construction:** Molded high performance polyurethane with high modulus Nylon reinforcement

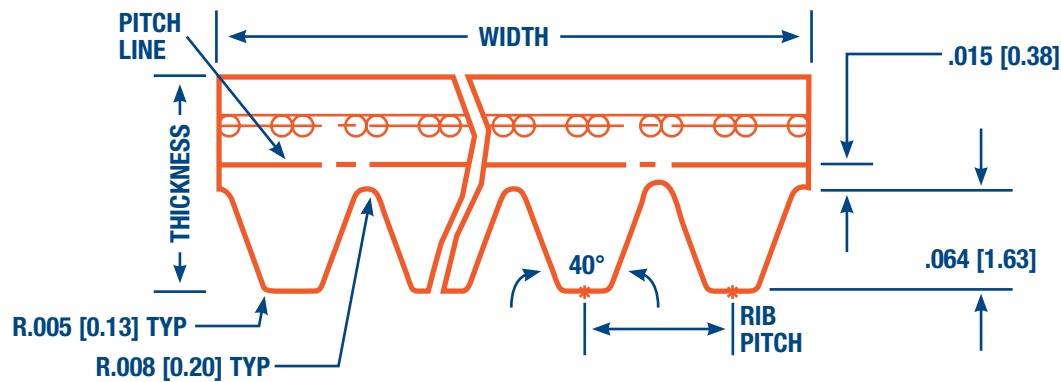

Type	Ribs	Top Width (mm)	Thickness (mm)	Angle	Tension Per Rib (N)	Temperature Range	Minimum Pulley Diameter	Maximum Belt Speed
EPJ	2 or 3	2.34 per rib	3.6 +/- .25	40° +/-2°	24.5 to 50.0	minus -20C to 70C	20 mm	55 m/s